

**MiBOXER**<sup>®</sup> | **Mi·Light**  
Subordinate New Brand

**IP Rate: IP66**  
**6W RGB+CCT Smart LED Garden Light**  
Model No.: FUTC04

# Features



RGB+CCT

16 Millions of colors to choose



Color temperature

2700K~6500K



Dim brightness/

Saturation



2.4G RF wireless transmission  
technology



Remote control

Control distance 30m



Smartphone APP control

(2.4GHz gateway is needed)



Support third party voice control

(2.4GHz gateway is needed)



Waterproof and dustproof  
grade IP66



Signal transmitting &

Modes synchronization



Beam angle 25°

Illumination distance more than 10m

# Parameters

Model No.: FUTC04

Input: AC100~240V 50/60Hz

Power: 6W

Working Temp.: -20~45°C

Color Temp.: 2700K~6500K

Luminous Flux: 550LM

Light Efficiency: 90LM/W

Lifespan: 50000 hours

CRI: >80

PF: >0.5

Beam Angle: 25°


Illumination Distance: >10m

IP Rate: IP66

RF: 2.4GHz

Control Distance: 30m

Lamp body weight: 180g

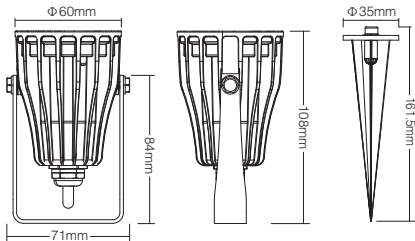


## Signal transmitting

One garden light can transmit the signals from the remote control to another garden light within 30m, as long as there is a garden light within 30m, the remote control distance can be limitless.

# Modes synchronization

Different garden light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

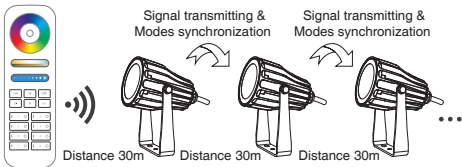


# Connection diagram

Input: AC100~240V

(L)  
Brown

(N)  
Blue

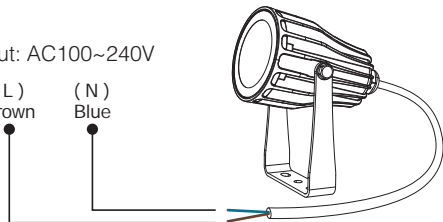

# Link/Unlink

Compatible with these remote controls (Purchased separately)



## NOTE:

Lighting can be working after linking with remote;  
for more details, pls read the remote instruction.

## Dynamic Mode Sheet

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

# Attention

1. When install the lighting fixtures, pls switch off the power to make sure the safty.
2. Please check whether the input voltage supply is in accordance with the lighting fixtures.
3. Non-professional user cannot dismantle the lighting fixtures directly, otherwise, it may cause fire and electric shock.
4. The working temperature is  $-20\sim 45^{\circ}\text{C}$ ; do not use the device to direct sunlight, moist and other high temperature area.
5. Please do not use lighting fixtures around the mental area and high magnetic field, otherwise, it will badly affect the control distance.
6. Users must be correct, strict and solid to install the lighting fixtures; do not use the lighting fixtures on strenuous vibration area.
7. The lighting fixtures will be heating on working, pls do not cover the lighting housing.



Signal transmitting &  
Modes synchronization

Made in China