




# EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

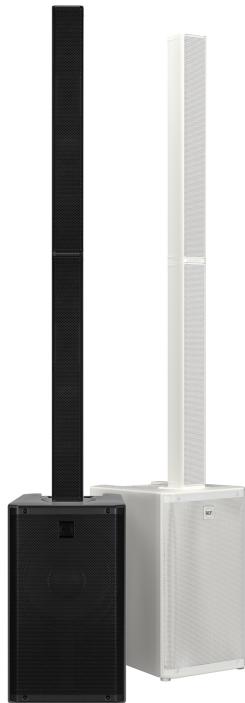


|                    |  |  |  |  |
|--------------------|--|--|--|--|
| <b>Description</b> | EVOX J11 is an active, three-way portable column system designed for maximum clarity and power in a compact format. A 1.75" compression driver coupled with a 120° × 40° True Resistive Waveguide ensures wide, consistent coverage, while 12 x 3" full-range transducers and a high-power 12" woofer in a bass-reflex enclosure deliver articulate mids and deep, controlled lows. Driven by a 3500W onboard dual-channel Class-D amplifier, EVOX J11 delivers an impressive 132 dB Max SPL output. Part of the EVOX J Series, it incorporates RCF's tour-grade technology into a sleek, unobtrusive package that delivers crystal-clear vocals, natural musical response, and effortless deployment for bands, DJs, and live performers. |  |  |  |
| <b>Features</b>    | <ul style="list-style-type: none"><li>› 132 dB Max SPL</li><li>› 3500 W Class-D Amplifier - Built-In DSP</li><li>› 1.75" Neo Compression Driver - 120° X 40° True Resistive Waveguide</li><li>› 12 x 3" Full-Range Neo Transducers</li><li>› 12" High-Power Woofer</li><li>› Enhanced Coverage And Clarity</li><li>› Composite Cabinet With Aluminum Stand Mount</li><li>› Sleek, Road-Ready Design</li><li>› Top Speaker Padded Carrying Bag Included</li></ul>   |  |  |  |
| <b>Part Number</b> | 13000932 EVOX J11<br>13000933 EVOX J11<br>13000987 EVOX J11 W<br>13000988 EVOX J11 W   | 220-240 V<br>100-120 V<br>220-240 V<br>100-120 V | Black<br>Black<br>White - RAL 9003<br>White - RAL 9003 | EAN 8024530024147<br>EAN 8024530024185<br>EAN 8024530024451<br>EAN 8024530024482 |



# EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

Line Art 2D

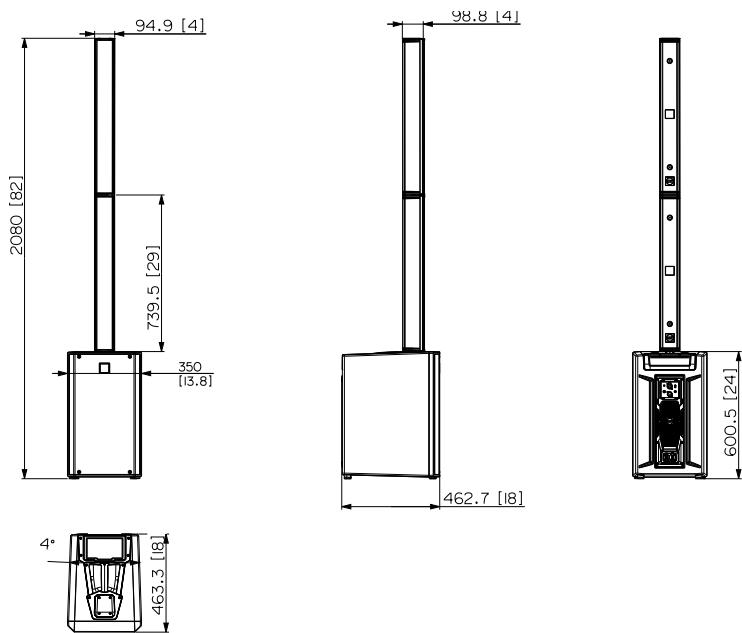

## TECHNICAL SPECIFICATIONS

|                                  |                           |   |
|----------------------------------|---------------------------|---|
| <b>Acoustical specifications</b> | Frequency Response        | 37 Hz - 20000 Hz                          |
|                                  | Max SPL @ 1m              | 132 dB                                    |
|                                  | Horizontal coverage angle | 120°                                      |
|                                  | Vertical coverage angle   | 40°                                       |
| <b>Transducers</b>               | Compression Driver        | 1 x 0.75" neo, 1.75" v.c                  |
|                                  | Fullrange                 | 12 x 3.0" neo, 1.0" v.c                   |
|                                  | Woofer                    | 1 x 12", 2.5" v.c                         |
| <b>Input/Output section</b>      | Input signal              | bal/unbal                                 |
|                                  | Input connectors          | Combo XLR/Jack                            |
|                                  | Output connectors         | XLR                                       |
|                                  | Input sensitivity         | +4 dBu                                    |
| <b>Processor section</b>         | Crossover Frequencies     | 160 Hz/1800 Hz                            |
|                                  | Protections               | Thermal, RMS                              |
|                                  | Limiter                   | Soft Limiter                              |
|                                  | Controls                  | Volume, Presets: LINEAR/LIVE, CLUB, VOICE |
| <b>Power section</b>             | Total Power               | 3500 W Peak                               |
|                                  | High frequencies          | 1500 W Peak                               |
|                                  | Low frequencies           | 2000 W Peak                               |
|                                  | Cooling                   | Convection                                |
|                                  | Connections               | Powercon TRUE1 TOP IN/OUT                 |
| <b>Standard compliance</b>       | Safety agency             | CE compliant                              |



# EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

|                                |                       |                         |                         |
|--------------------------------|-----------------------|-------------------------|-------------------------|
| <b>Physical specifications</b> | Cabinet/Case Material | PP Composite            |                         |
|                                | Handles               | 1 Top                   |                         |
|                                | Pole mount/Cap        | Quick-fit socket        |                         |
|                                | Grille                | Steel                   |                         |
|                                | Color                 | Black, White - RAL 9003 |                         |
|                                | Height                | 2285 mm / 89.96 inches  |                         |
|                                | Width                 | 400 mm / 15.75 inches   |                         |
|                                | Depth                 | 460 mm / 18.11 inches   |                         |
|                                | Weight                | 29 kg / 63.93 lbs       |                         |
|                                | <b>ACCESSORIES</b>    |                         |                         |
| <b>Rigging / Mounting</b>      | <b>FLOOR STANDS</b>   |                         |                         |
|                                | 13360768              | PMK60768                | Black - RAL 9005        |
| <b>Protections</b>             | 13360770              | PMK60770                | White - RAL 9003        |
|                                | <b>COVERS</b>         |                         |                         |
|                                | 13360751              | CVR60751                | Black EAN 8024530024536 |
|                                | 13360752              | CVR60752                | Black EAN 8024530024543 |