

NX 912-SMA PROFESSIONAL ACTIVE STAGE MONITOR




Description	NX 912-SMA speaker is a stage monito combination of a 1.75" compression dr waveguide produces coherent 100° x distortion-free sound. Used as a stage subwoofer, the NX 912-SMA blends hi proprietary FiRPHASE and Bass Motic absolute clarity and deep, powerful ba carry and set up on stage or on a pole	river, 12" woofer, two-ch. 70° coverage for the list e monitor, stand-alone sp gh performance and reli on Control DSP processir ass response. The tour-re	annel 2,100W ening area wit beaker system ability in a cor ng, NX 912-SM	amplifier, and the TRW :h up to 130dB SPL of , or satellite paired with a npact package. Combining RCF A Series speakers deliver
Features	<ul> <li>&gt; Up to 130 dB Sound Pressure Level</li> <li>&gt; 2100W Class-D bi-amplification</li> <li>&gt; 50-20000 Hz linear frequency responsion Driver</li> <li>&gt; 1.75" Compression Driver</li> <li>&gt; 12" Woofer</li> <li>&gt; FiRPHASE zero degrees phase technics</li> <li>&gt; Bass Motion Control woofer excursion</li> <li>&gt; 70°x100° Constant Directivity Cover</li> <li>&gt; Perfectly tailored for horizontal or vertices</li> </ul>	nology on management rage Angle		
Part Number	13000783 NX 912-SMA 13000784 NX 912-SMA	220-240 V 100-120 V	Black Black	EAN 8024530020569 EAN 8024530020576



NX 912-SMA PROFESSIONAL ACTIVE STAGE MONITOR

Line Art 2D

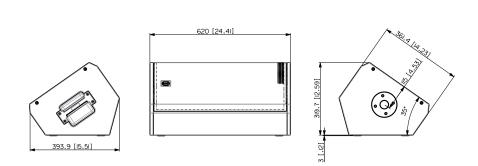

Acoustical	specifications
Acoustical	specifications

## **TECHNICAL SPECIFICATIONS**

Acoustical specifications	Frequency Response Max SPL @ 1m Horizontal coverage angle Vertical coverage angle	50 Hz ÷ 20000 Hz 130 dB 100° 70°
Transducers	Compression Driver Woofer	1 x 1.0", 1.75" v.c 1 x 12", 2.5" v.c
Input/Output section	Input signal Input connectors Output connectors Input sensitivity	bal/unbal Combo XLR/Jack XLR -2 dBu/+4 dBu
Processor section	Crossover Frequencies Protections Limiter	1600 Hz Thermal, RMS Soft Limiter
Power section	Total Power High frequencies Low frequencies Cooling Connections	2100 W Peak 700 W Peak 1400 W Peak Convection Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material Handles Pole mount/Cap Grille Color	Plywood 1 on side and 1 on top 35 mm insert Steel Black
Size / Weight	Height Width Depth Weight	320 mm / 12.6 inches 620 mm / 24.41 inches 394 mm / 15.51 inches 20 kg / 44.09 lbs



NX 912-SMA PROFESSIONAL ACTIVE STAGE MONITOR

	ACCESSORIES		
Rigging / Mounting	FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	POLE MOUNT KITS		
	13360232 AC PMX 13360110 AC PRO-PM	Black	EAN 8024530010058 EAN 8024530006488
	13360067 PM-KIT M20	Black	EAN 8024530000488
Protections	BAGS, COVERS, RAIN PROTECTIONS	Didek	2/11/002 1000011000
	13360612 CVR 011	Black	EAN 8024530020958
	RAIN PROTECTIONS		
	13360515 RP 001	Black - RAL 9005	EAN 8024530020460
	13360700 RPR60700	Black - RAL 9005	EAN 8024530023072
Cables			EAN 000 4570000 400
	13360102 AC XLR 3M3F		EAN 8024530006402