



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER



Description SUB 808-AS is a compact low-profile high-performance active subwoofer. It features two vented-loaded 8" cone woofers powered by a 2000 Watts two-channel amplifier -one for each woofer- on a baltic birch plywood cabinet painted with black or white polyurea and weatherproof treatment. Management and tuning are available via RDNet software or using the two preset buttons, a polarity button, and a variable delay accessible from the back panel. The cabinet features rubber feet on two sides and two threaded pole-mounts for horizontal and vertical placement. Two stabilizing brackets make the vertical placement stable and firm. SUB 808-AS can be used stand-alone, in subwoofer arrays, or as the low-frequency complement for KX 515-A speaker.

- Features**
- › 129 dB max SPL
 - › 40 Hz to 400 Hz frequency range
 - › 2 x 8" neodymium woofers, 2.5" v.c.
 - › 2000 W Class-D Amplifier
 - › RDNet Networked Management
 - › Bass Motion Control excursion management
 - › powerCON TRUE1 TOP mains connectors
 - › Available in full black or white coating


Part Number	13000871	SUB 808-AS W	100-120 V	White	EAN 8024530021924
	13000872	SUB 808-AS W	220-240 V	White	EAN 8024530022075
	13000898	SUB 808-AS	100-120 V	Black	EAN 8024530022877
	13000899	SUB 808-AS	220-240 V	Black	EAN 8024530022785
	13000953	SUB 808-AS	UK 220-240 V	Black	EAN 8024530023362
	13000955	SUB 808-AS W	UK 220-240 V	White	EAN 8024530023379



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER

Line Art 2D

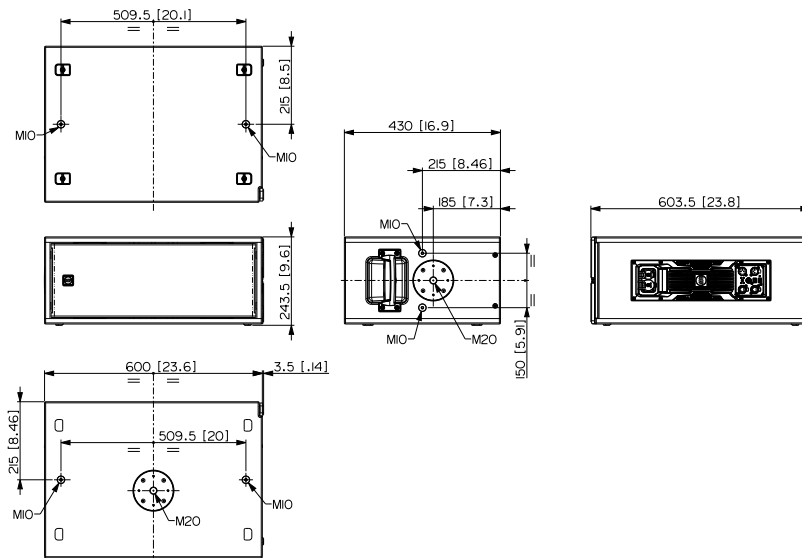

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	40 Hz ÷ 400 Hz
	Max SPL @ 1m	129 dB
Transducers	Woofer	2 x 8" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Volume
	RDNet	Onboard
Power section	Total Power	2000 W Peak
	Low frequencies	2000 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	2X M20 TOP AND SIDE 8X M10 2X SIDE
	Handles	1 X SIDE
	Pole mount/Cap	35 mm insert
	Grille	Steel with clothing
	Color	Black, White
Size / Weight	Height	243.5 mm / 9.59 inches
	Width	603.5 mm / 23.76 inches
	Depth	430 mm / 16.93 inches
	Weight	20 kg / 44.09 lbs



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER

Rigging / Mounting	ACCESSORIES		
	HORIZONTAL BRACKETS		
	13360709 HBR60709	Black	EAN 8024530023058
	POLE MOUNT KITS		
Protections	13360232 AC PMX		EAN 8024530010058
	13360638 PM-KIT M20	White	EAN 8024530022303
	13360067 PM-KIT M20	Black	EAN 8024530014599
	COVERS		
Cables	13360708 CVR60708	Black	EAN 8024530022884
	RAIN PROTECTIONS		
	13360689 RPR60689	Black	EAN 8024530022914
	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402