

# **UP 8502**

# POWER AMPLIFIER

#### **DESCRIPTION**

The UP 8500 series power amplifiers are designed with an innovative RCF power supply and amplification technology. The full digital technology allows merging extremely high efficiency both with AC and DC power supply, pro audio quality reproduction and compactness. All UP 8500 series power amplifiers are certified according to EN 54-16 standard in combination with DXT 7000 Voice Alarm system.



# **FEATURES**

- 2 x 250 W power amplifier
- 2 inputs per channel
- Dual AC and DC power supply
- Priority circuit
- No output lines tranformers
- Status LEDs on front panel

Rev. N Last update: 03/05/2021



### **TECHNICAL SPECIFICATIONS**

| Amplifier specifications | Amplifier Class:                          | D                       |
|--------------------------|---|-------------------------|
|                          | Number of channels:                       | 2                       |
|                          | Power output (@ 100V):                    | 500 W RMS               |
|                          | Frequency Response (-3dB):                | 40 Hz ÷ 16 Hz           |
|                          | Signal/noise rate ("A" weighted)          | >86 dB                  |
|                          | Crosstalk                                 | <70 dB                  |
|                          | Distortion (THD+N) @ 1 kHz nominal power: | <0.3 %                  |
| Input section            | Total number of inputs:                   | 4                       |
|                          | Balanced:                                 | 4                       |
|                          | Mono:                                     | 2                       |
|                          | Stereo:                                   | 2                       |
|                          | Line inputs:                              | 4                       |
|                          | Line connectors:                          | Euroblock               |
|                          | General Purpose Inputs (GPI):             | 4                       |
| Output section           | Power output connectors:                  | Euroblock               |
|                          | General Purpose Outputs (GPO):            | 1                       |
| Controls                 | Configuration:                            | DIP switch, Front panel |
|                          | Priority:                                 | Yes                     |
| Protections              | Cooling:                                  | Forced                  |
|                          | Short circuit:                            | Yes                     |
|                          | Thermal:                                  | Yes                     |
|                          | DC:                                       | Yes                     |
|                          | Fuses:                                    | Yes                     |
| Power requirement        | Operating voltage:                        | 220-240/115 V~ 50/60Hz  |
|                          | Voltage selection:                        | Internal                |
|                          | DC power:                                 | Yes                     |
|                          | DC power value:                           | 48 V                    |
|                          | Power consumption:                        | 800 W                   |
| Standard compliance      | EN54-16 certified:                        | Yes                     |
|                          | CE marking:                               | Yes                     |
|                          | CPR number:                               | 1438-CPR-0241           |
| Physical specifications  | Cabinet/Case Material:                    | Metal                   |
|                          | Color:                                    | Black,                  |
|                          | Rack mounting:                            | 19", 1U                 |
| Size                     | Height:                                   | 44 mm / 1.73 inches     |
|                          | Width:                                    | 482 mm / 18.98 inches   |
|                          | Depth:                                    | 375 mm / 14.76 inches   |
|                          | Weight:                                   | 5.2 kg / 11.46 lbs      |



**Shipping informations** Package Height: 180 mm / 7.09 inches

Package Width: 550 mm / 21.65 inches
Package Depth: 480 mm / 18.9 inches
Package Weight: 7.2 kg / 15.87 lbs

#### **PART NUMBER**


· 12135099 · 12135077

UP 8502 UP 8502 115V 220-240V

EAN 8024530010874 EAN 8024530007331



### **DRAWINGS**

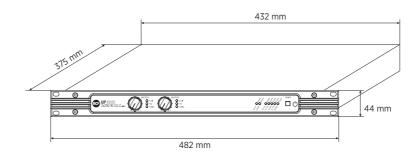

#### **PANELS**

Front panel



Rear panel

